




# Combination Terminal Blocks utilising both screw and spring contacts Ideal for Lighting Applications

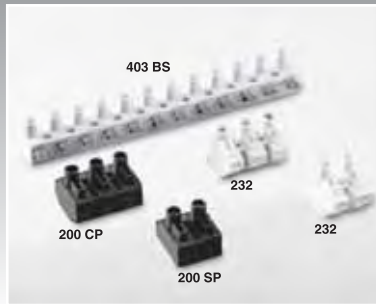

Description		Part Number	Part Number	Part Number	Part Number	Part Number
T. b. without wire protector - 12 poles		200-FV-CP	200-FV-SP	232-NY	403-BS	403-SPM
T.b. with wire protector in stainless steel (LP)		200-FV-LPCP	200-FV-LPSP		403-BS-LP	403-SPM-LP
Material of the insulating body		PA 6.6 UL94 V0	PA 6.6 UL94 V0	PA 6.6 UL94 V2	PA 6.6 UL94 V2	PA 6.6 UL94 V2
Notes		CP with foot	SP without foot		BS solderable pin	SPM plug for 433-SPF
Number of poles		n.	<b>2-3-4-6-12</b>	<b>2-3-4-6-12</b>	<b>2-3-4-6-12</b>	<b>2-3-4-6-12</b>
Dimensions:						
Pitch	A mm	<b>10</b>	<b>10</b>	<b>10</b>	<b>10</b>	<b>10</b>
Length	B mm	117	117	117	117,5	117,5
Width	C mm	20,4	20,4	19	14	14
Height	D mm	18,7	16,2	19	15,8	15,8
Height of the body only	E mm	12	9,6	12	9,6	9,6
Screw (in steel / zinc)	F M	3,5	3,5	3,5	3	3
Bush hole	G mm	3,8 x 3,5 / in steel	3,8 x 3,5 / in steel	3,8 x 4,8 / in steel	ø 3,4 in OT58 nickel plated	ø 3,4 in OT58 nickel plated
Fixing hole diameter	H mm	2,8	2,8	3	3,5	3,5
Working temperature	°C	<b>150</b>	<b>150</b>	<b>110</b>	<b>110</b>	<b>110</b>
Packing	n.	2p 3000 3p 2000 4p 1200 6p 800 12p 440	2p 3000 3p 2000 4p 1200 6p 800 12p 450	2p 3000 3p 2000 4p 1200 6p 800 12p 440	2p 3000 3p 2000 4p 1200 6p 800 12p 450	2p 2000 3p 1300 4p 1000 6p 700 12p 380
Accessories and markings		12	12	12	12	12
Approvals:						
CEI 23-20/-21/-30						
Terminal blocks without wire protector		1,5/4mm <sup>2</sup> 32A 450V	1,5/4mm <sup>2</sup> 32A 450V	1,5/6mm <sup>2</sup> 15A 400V	4mm <sup>2</sup> 32A 450V	4mm <sup>2</sup> 32A 450V
T.b. with wire protector (LP)		1,5/4mm <sup>2</sup> 32A 450V	1,5/4mm <sup>2</sup> 32A 450V		2,5mm <sup>2</sup> 24A 450V	2,5mm <sup>2</sup> 24A 450V
UL 486 E		T 115 °C	T 115 °C	T 105 °C	T 105 °C	T 105 °C
Terminal blocks without wire protector		14/12AWG 15A 300V	14/12AWG 15A 300V	14/8AWG 17,5A 300V	12AWG 20A 300V	12AWG 20A 300V
T.b. with wire protector LP		14/12AWG 15A 300V	14/12AWG 15A 300V		12AWG 20A 300V	12AWG 20A 300V
				Also available version without fixing hole		Also available type 403-SPM2 with plug 2 mm ⌀